


GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: **2000 LBS.** TRAILER WEIGHT & **200 LBS.** TONGUE WEIGHT.
 DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

PARTS LIST/LISTE DE PIÉCES					
Num	QTY	DESCRIPTION	Num	QTY	DESCRIPTION
1	2	LOCK WASHER 1/2	7	2	FLAT CENTRE GROSSE NUT
2	2	FLAT WASHER 1/2	8		
3	2	HEX BOLT M12 X 50 X 1.75	9		
4	2	HEX BOLT 8 X 45 1.25	10		
5	2	LOCK WASHER 5/16	11		
6	2	FLAT WASHER 5/16	12		FILAGE SUGGÉRÉ / WIRING: 119147

REPLACEZ LE BOULON
D'ORIGINE PAR BOULON FOURNIE #4

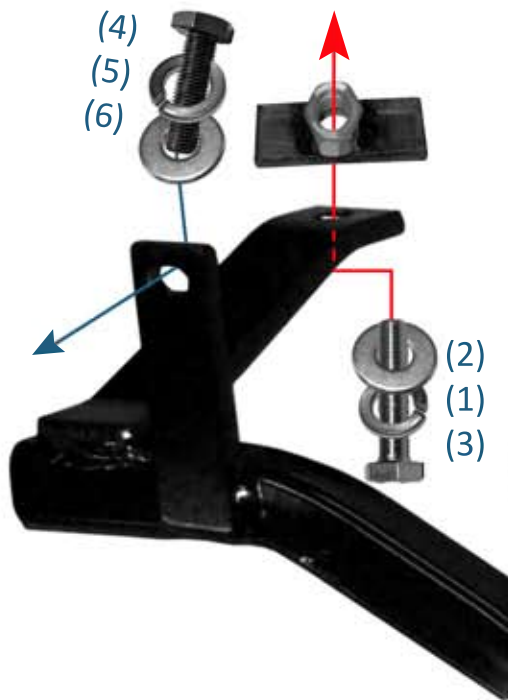

RETIRER LE BOUCHON DE CAOUTCHOU
ET INSÉRER FLAT AVEC ECROU SOUDÉ



INSTALLATION :

- ENLEVER LES DEUX BOULONS INTERIEURS QUI RETIENNENT LE PARE-CHOC DE MÉTAL (8 MM)
- RETIRER LE BOUCHON DE CAOUTCHOUC SOUS LE CHASSIS DE CHAQUE COTÉ ET INSÉRER LA PLAQUE AVEC ÉCROU À L'INTERIEUR EN PASSANT PAR LE MEME TROU.
- INSTALLER L'ATTACHE EN PLACE, BOULONNER À L'AIDE DES BOULONS 8 X 45 COTÉ INTERIEUR DE PARE-CHOC LÀ OU VOUS AVEZ RETIRÉ LES BOULONS D'ORIGINES.
- À L'AIDE DES BOULONS 12 X 40 FIXER L'ATTACHE SOUS LE CHASSIS AUX PLAQUES AVEC ECROU INSÉRÉS DANS LE CHASSIS
- SERRER LE TOUT SOLIDEMENT

SRG trailer hitches., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, SRG trailer hitches Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. SRG trailer hitches Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.