


GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: **2000** LBS. TRAILER WEIGHT & **200** LBS. TONGUE WEIGHT.
DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

PARTS LIST/LISTE DE PIÉCES					
Num	QTY	DESCRIPTION	Num	QTY	DESCRIPTION
1	4	LOCK WASHER 1/2	7		
2	4	FLAT WASHER 1/2	8		
3	3	HEX BOLT M12 X 40 X 1.25	9		
4	1	HEX BOLT M12 X 40 X 1.75	10		
5			11		
6	1	FLAT WITH NUT	12		FILAGE SUGGÉRÉ / WIRING: 119147

Agrandir trou pour passer flat-nut
(Widen the hole to pass flat with nut)

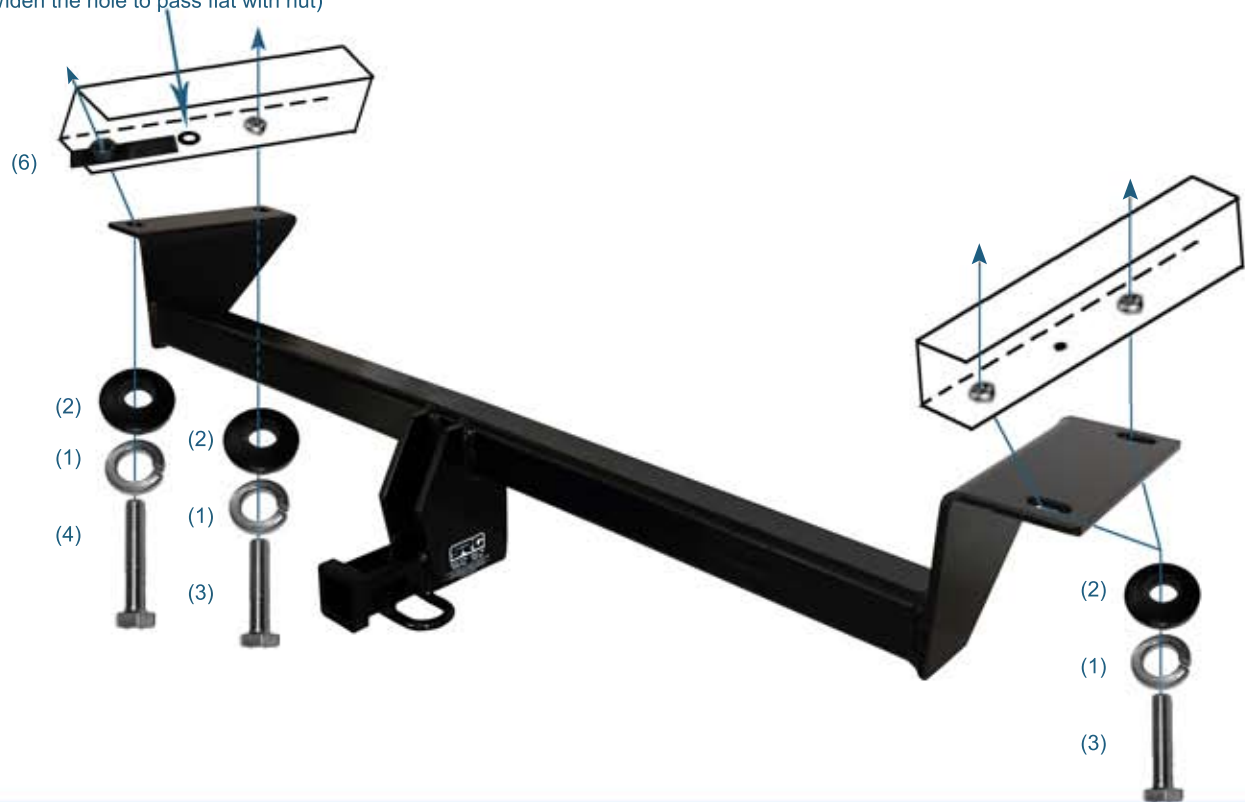

INSTALLATION :

METTRE L'ATTACHE EN PLACE. AGRANDIR LE TROU INDiqué SUR LE PLAN ET PASSER FLAT NUT,
BOULONNER L'ATACHE A L'AIDE DES BOULONS FOURNIES
SERRER LE TOUT SOLIDEMENT

PUT THE HITCH IN PLACE. WIDEN THE HOLE TO PASS FLAT WITH NUT.
BOLT ALL WITH BOLTS.
THIGTEN WELL.